


JDJJ2-12 Voltage Transformer

Summary

This potential transformer is single phase, oil-filled and used outdoor product. It has many metrics, such as big capability, high precision, etc. It has three windings: the 0.2 class of one is used for metering, the 0.5 class of one is used for control, and the 3 class is used for zero sequence protection.

Model


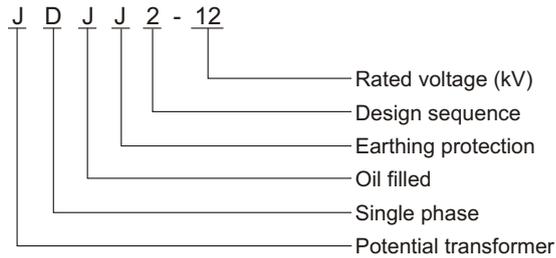


Structure feature

Rated voltage ratio(V)	Rated output class			Max.output(VA)	Rated insulated level(kV)
	0.2	0.5	3P		
6000/√3/100/√3/100/3	20	40	50	300	7.2/32/60
11000/√3/110/√3/110/3	20	50	50	500	12/42/75

Outline dimension

JDJJ2-12 Outline dimension

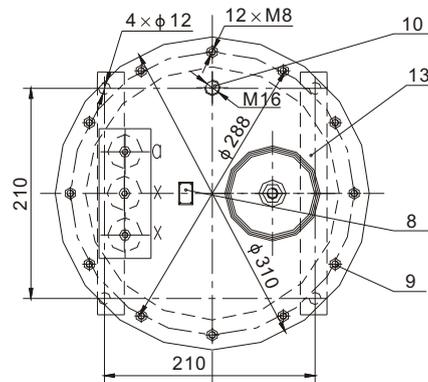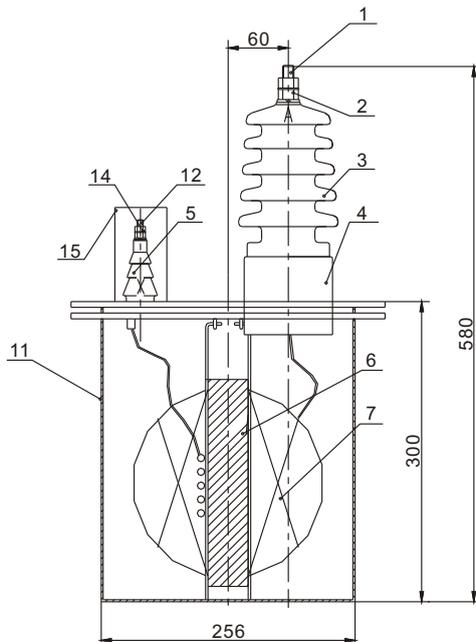

1. Conducting Rod
2. Standard Piece
3. Procelain Bushing
4. Cover
5. Procelain Bushing
6. Iron Core
7. Coil
8. Name Plate
9. Fixingsets
10. Stardard OilHole
11. PTBody
12. Conducting Rod
13. Mounting Base
14. Standard Piece
15. SealingCover